




- Their refined design appeals aesthetically to a wide range of uses, and the cylindrical shaped fitting is less than 160mm in length and is available in both black and white to suit your space. LED spotlight for 3-phase and monophase tracks. 350° rotatable and 180° tiltable. Alternatively highest energy efficiency with optimal price-performance ratio and CRI> 90.



Kodu/Code	:	IRSC.D.10.0.0.60.0.RF.0	IRSC.D.12.0.0.60.0.RF.0
Gücü/Power	:	10W	12W
Lümen/Lumen	:	1300Lm	1560Lm
Ölçüler/Dimensions (D x Ø mm)	:	150x60 mm	150x60 mm

Ürün Özellikleri /Product Features

Gövde Housing	:	Aluminyum Enjeksiyon Aluminium Injection
Optik/Optic	:	Alm. Reflektör/Alm Reflector
Kullanım Şekli/Usage	:	Ray/Track
Güç Faktörü/Power Factor	:	> 0,95 Cos φ
Çalışma Sıcaklığı Aralığı Operating Temp. Range	:	-20°C/+50°C

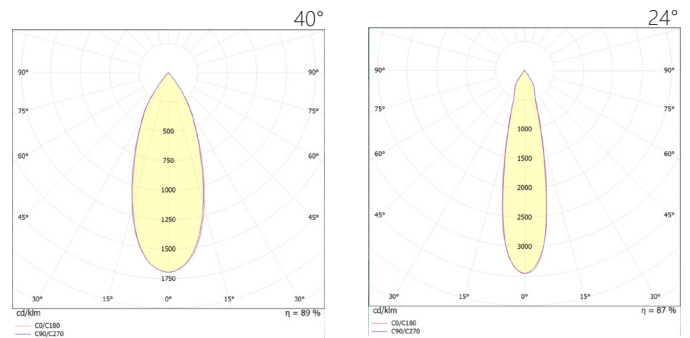

Opsiyonel Özellikler/Optional Features

İşık Rengi/CCT	:	3000K, 4000K, 5000K, 6500K
İşık Açısı/Beam Angle	:	24° , 40°
Acil urum Kiti/EMG	:	1-3 Saat/Hour
Kontrol / Control	:	On/Off, DALI, 1-10V, Bluetooth
Ürün Rengi/Body Colour	:	    RAL Colour



Lümen değerleri sadece referans içindir, değişiklik gösterebilir./ The lumen values are only for reference. There may be changes in the data.